


# SPLIT DE PARED 1x1

## Serie MF2



- Funciona hasta -7°C
- Filtro biológico antiolores
- Modo nocturno
- Rearme automático
- Reducidas dimensiones

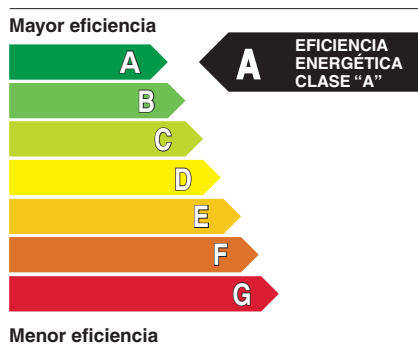

**INVERTER<sup>DC</sup>**

Código		CL19643	CL19644	CL19645	CL19646	CL19647	CL19648
		FW2-2250	FW2-3000	FW2-4500	FW2-2250-INV	FW2-3000-INV	FW2-4500-INV
	EAN	8432953007423	8432953007430	8432953007447	8432953007454	8432953007461	8432953007478
Capacidad Refrigeración	W	2700	3450	5300	2700(1450~3200)	3550(1300~ 3800)	5000(1800-5200)
Potencia absorbida Frio	W	841	1075	1645	820(380~1350)	1053(360~ 1300)	1548(550-2100)
Corriente Frio	A	3,65	4,70	7,20	3,57(1,5~5,9)	5,32(1,7~6,5)	8,5(2,2-10,2)
EER	W/W	3,21	3,21	3,22	3,29	3,37	3,23
Capacidad Calefacción	W	2800	3550	5500	2800(1400~3300)	3800(1400~4000)	5100(1800-5300)
Potencia absorbida Calor	W	776	983	1520	776(380~1540)	1053(380~1300)	1410(550-2100)
Corriente Calor	A	3,38	4,30	6,62	3,37(1,7~6,7)	5,32(1,8~7,0)	8,5(2,2-10,2)
COP	W/W	3,61	3,61	3,62	3,61	3,61	3,62
Corriente Máxima	A	5,8	8,3	10,0	7	10	12,9
Potencia Máxima	W	1150	1650	2200	2300	2300	2900
Carga de refrigerante	g	720	800	1160	900	870	1150
Caudal de aire	m <sup>3</sup> /h	420	550	730	420	580	650
Nivel Sonoro	dB(A)	36/50	39/52	45/53	33/52	35/53	43/53
Peso neto Ud. Interior	Kg	9,5	9,5	15	9,5	9,5	10
Peso neto Ud. Exterior	Kg	26	28	44	27	36	34
Compresor		GMCC	GMCC	HITACHI	GMCC	GMCC	SANYO
Dimensión neta	mm	802x265x190	802x266x190	880x280x203	802x260x180	802x265x190	880x286x203
Dimensión embalaje	mm	860x325x255	860x325x255	950x350x270	860x325x255	860x325x255	950x350x270
Dimensión neta	mm	700x500x225	760x540x260	800x300x590	760x260x540	760x260x540	790x548x277
Dimensión embalaje	mm	835x335x545	800x600x370	940x420x650	800x370x600	800x370x600	910x600x385